
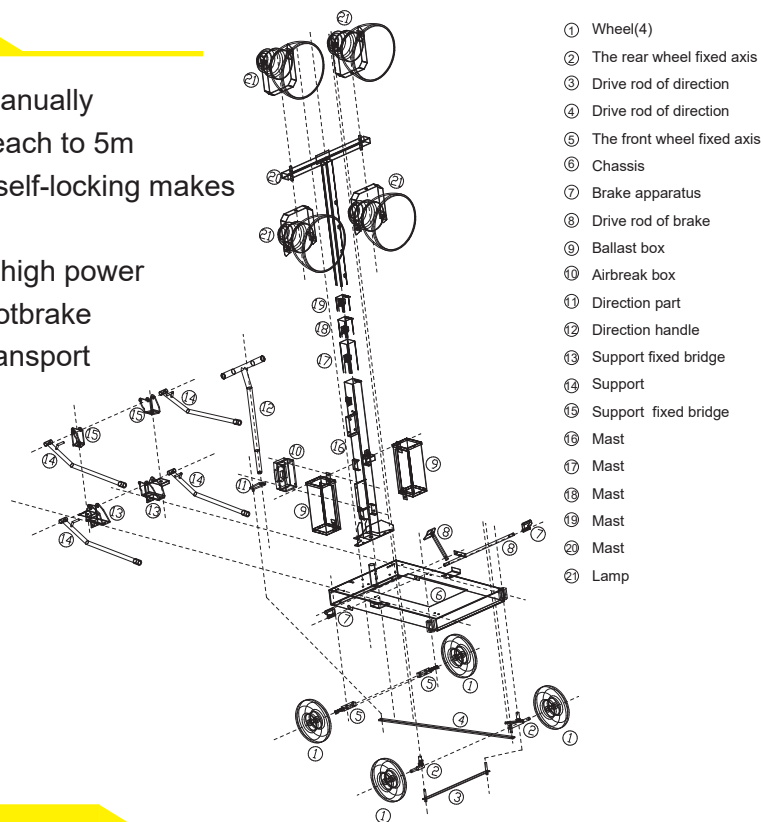



Hand Push Lighting Tower

Features

- Rise to any height manually
- 5 stages mast can reach to 5m
- Mast equipped with self-locking makes operation safer
- High luminance and high power
- Easy moving with footbrake
- Small and easy to transport

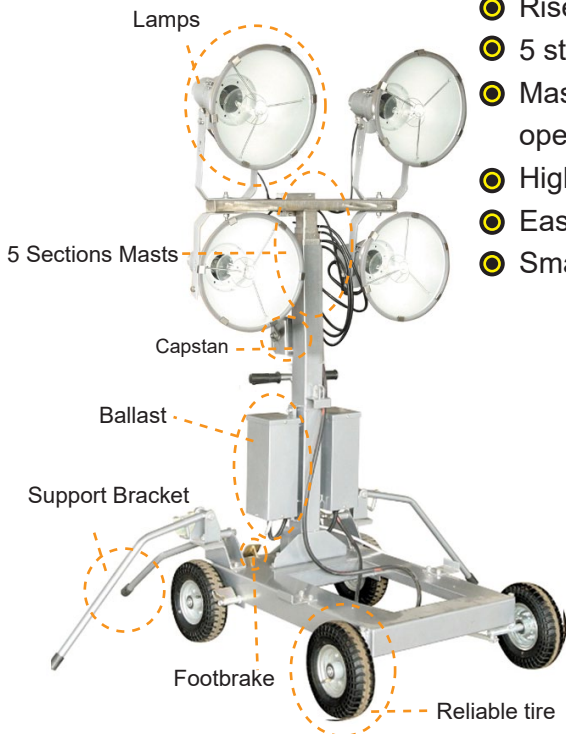

Specifications

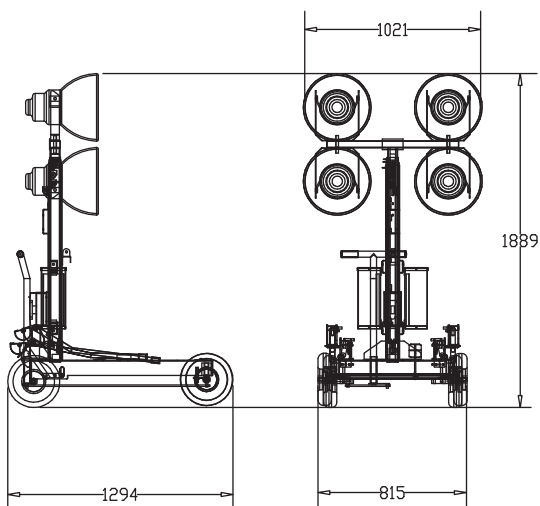

Model HHPL1600D	
Genset	
Model	HDA5500S
Frequency HZ	50/60
Rated Speed(r/min)	3000/3600
Rated AC Voltage	115/230v,150/240v
Prime Power(KVA)	4.5/5
Standby Power(KVA)	5/5.5
Engine	
Engine Make/Model	186FA, Diesel
Cooling	Air cool
Kw(HP) at continuous	5.7KW, 3000RPM / 6.3KW,3600RPM
Starting system	Electric Start
Fuel Capacity L	13.5
Fuel Consumption(L/h)	2.5
Displacement L	0.418
Alternator	
Output KVA	4.5
Eciter Type	Brush
Power Factor	1
Insulation Grade	H
Pole No	50
Lighting	
Type of Lamp	Metal halide 400W
Lamp No.	4
Output Lumens	220,000
Mast	
Type	Multi-Sections Telescoping
Height	5.4M
Winch	Hand operated winch with safety brake/Electric Winch
Traveling	Retracts and Stows Horizontally for travel tower is locked into
Weight KG	290
Size MM	1060*540*2100